

contourLED


NEON Side Bend White

The Contour LED NEON Side Bend White Strip Light features SMD2835 LEDs with a high density of 120 LEDs per metre.


Available in 5m lengths.
5 year warranty.
UL/CE/RoHS approval.
Contact us for more specifications.



Power Rear Feed

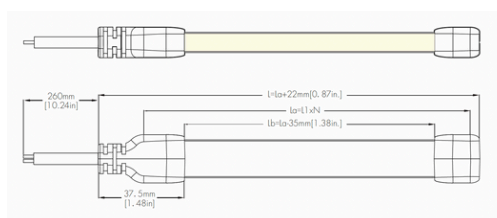

Power Side Feed

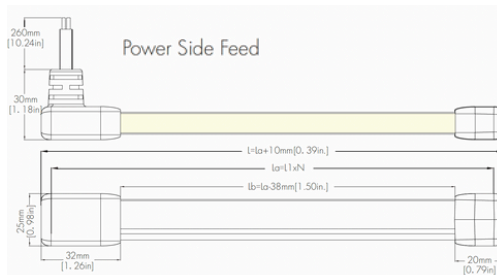

LED Type SMD2835

LED QTY 120LEDs/M

Voltage 24VDC

Power 14W/M

Colour Temp 3000K
(Available options 2700K→ 6500K)

Brightness 450lm/M

Dimensions 5000 x 20 x 10mm



Cut Length Free cutting

Beam Angle 120°


IP Rating IP67 & IK07

Dimming PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*). *Dependant third-party driver.

Power Bottom Feed

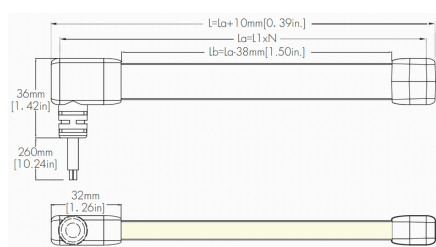

Contact us for more specifications info@ledlimited.co.uk
Find out more at www.ledlimited.co.uk

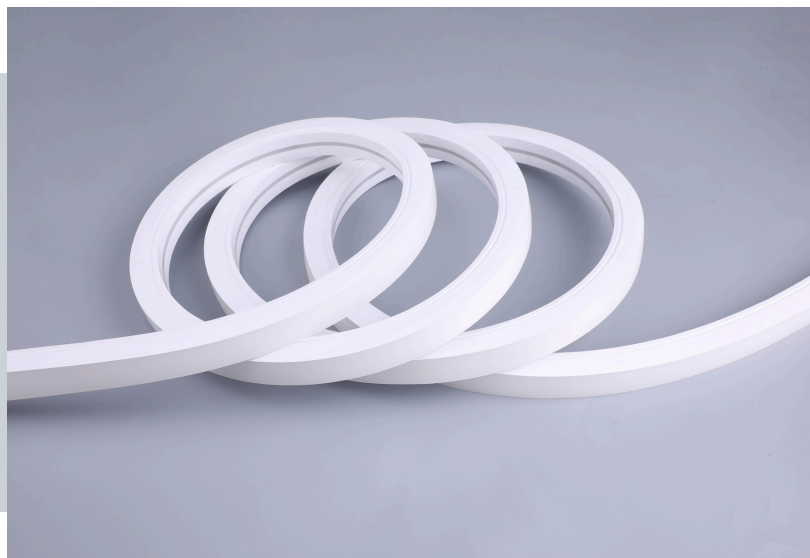

contourLED


NEON Side Bend CCT

The Contour LED NEON Side Bend CCT Strip Light features SMD2835 LEDs with a high density of 192 LEDs per metre.


Available in 5m lengths.
5 year warranty.
UL/CE/RoHS approval.
Contact us for more specifications.



Power Rear Feed

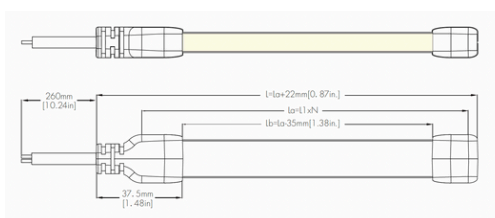

Power Side Feed

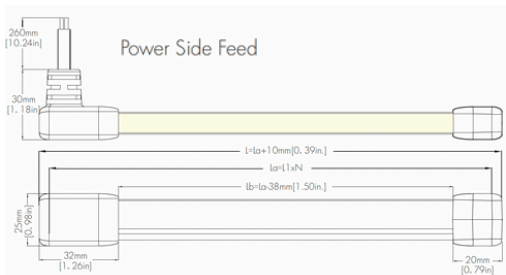

LED Type SMD2835

LED QTY 192LEDs/M

Voltage 24VDC

Power 14W/M

Colour Temp 2700K → 6500K

Brightness 350lm/M

Dimensions 5000 x 20 x 10mm



Cut Length 62.5mm

Beam Angle 120°

IP Rating IP67 & IK07

Dimming PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*). *Dependant third-party driver.

Power Bottom Feed

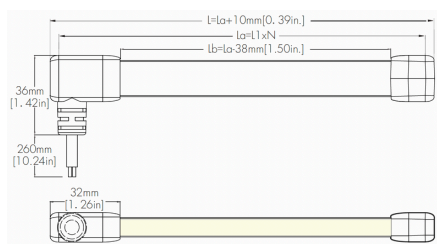

contourLED

NEON Side Bend RGB

The Contour LED NEON Side Bend RGB Strip Light features SMD4040 LEDs with a density of 96 LEDs per metre.

Available in 5m lengths.


5 year warranty.

UL/CE/RoHS approval.


Contact us for more specifications.



Power Rear Feed

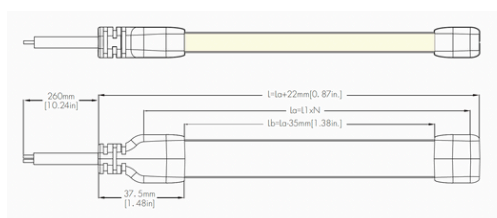

Power Side Feed

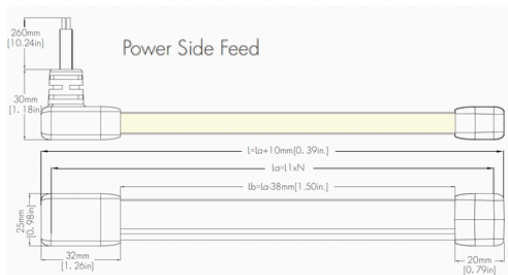

LED Type SMD4040

LED QTY 96LEDs/M

Voltage 24VDC

Power 14W/M

Colour Temp RGB

Brightness 190lm/M

Dimensions 5000 x 20 x 10mm



Cut Length 62.5mm

Beam Angle 120°

IP Rating IP67 & IK07

Dimming PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*). *Dependant third-party driver.

Power Bottom Feed

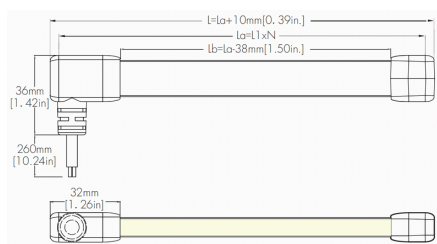

contourLED


NEON Side Bend RGBW

The Contour LED NEON Side Bend RGBW Strip Light features SMD5050 LEDs with a density of 96 LEDs per metre.


Available in 5m lengths.
5 year warranty.
UL/CE/RoHS approval.
Contact us for more specifications.



Power Rear Feed

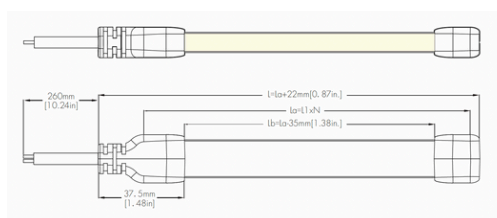

Power Side Feed

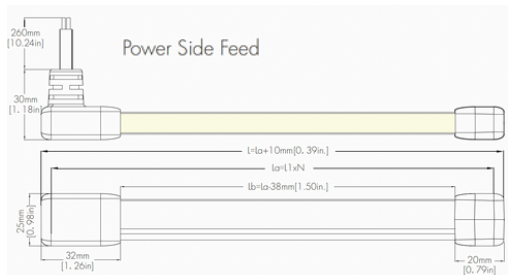

LED Type SMD5050

LED QTY 96LEDs/M

Voltage 24VDC

Power 18W/M

Colour Temp RGB+3000K
(Available options 2700K→6500K)

Brightness 204lm/M

Dimensions 5000 x 20 x 10mm



Cut Length 62.5mm

Beam Angle 120°

IP Rating IP67 & IK07

Dimming PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*). *Dependant third-party driver.

Power Bottom Feed

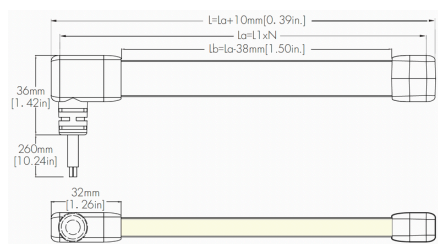

contourLED


NEON Side Bend Pixel SPI RGB

The Contour LED NEON Side Bend Pixel SPI RGB Strip Light features SMD5050 LEDs with a density of 84 LEDs per metre.


Available in 5m lengths.
3 year warranty.
UL/CE/RoHS approval.
Contact us for more specifications.




Power Rear Feed

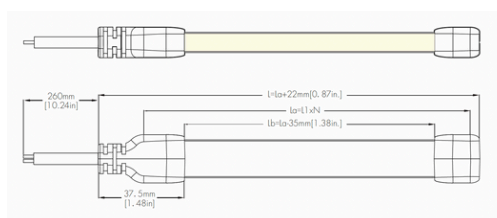

Power Side Feed

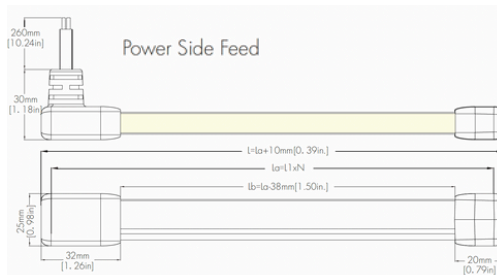

Contact us for more specifications info@ledlimited.co.uk
Find out more at www.ledlimited.co.uk

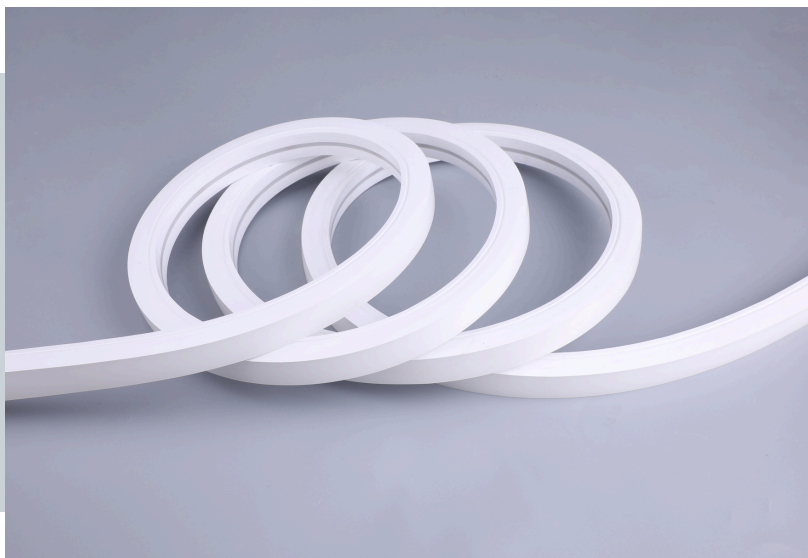

LED Type SMD5050

LED QTY 84LEDs/M

Pixel Density 14 Pixels/M

Voltage 24VDC

Power 14W/M

Colour Temp RGB

Brightness 90lm/M

Dimensions 5000 x 20 x 10mm



Cut Length 71.4mm

Beam Angle 120°

IP Rating IP67 & IK07

Dimming SPI signal with UCS2904 using smart IC.

Power Bottom Feed

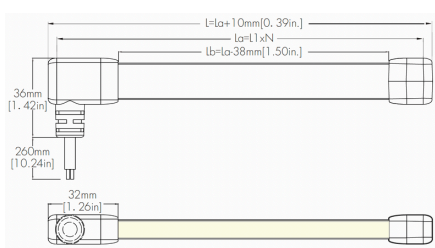

contourLED


NEON Side Bend Pixel SPI RGBW

The Contour LED NEON Side Bend Pixel SPI RGBW Strip Light features SMD5050 LEDs with a density of 84 LEDs per metre.


Available in 5m lengths.
3 year warranty.
UL/CE/RoHS approval.
Contact us for more specifications.




Power Rear Feed

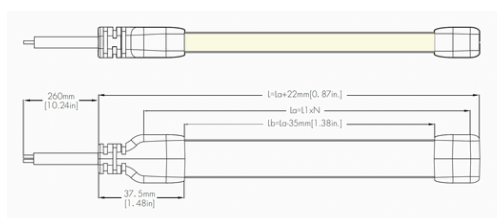

Power Side Feed

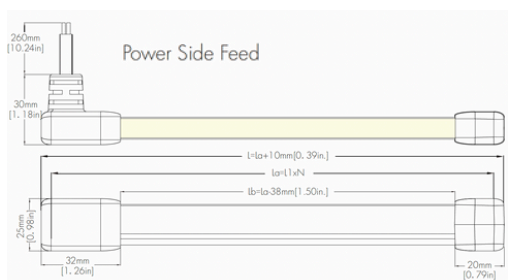

Contact us for more specifications info@ledlimited.co.uk
Find out more at www.ledlimited.co.uk

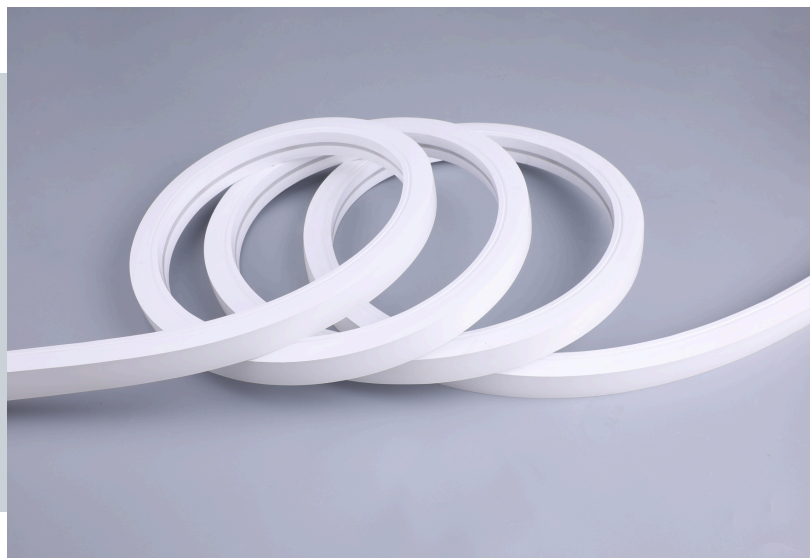

LED Type SMD5050

LED QTY 84LEDs/M

Pixel Density 14 Pixels/M

Voltage 24VDC

Power 18W/M

Colour Temp RGB+3000K
(Available options 2700K→ 6500K)

Brightness 153lm/M

Dimensions 5000 x 20 x 10mm



Cut Length 71.4mm

Beam Angle 120°

IP Rating IP67 & IK07

Dimming SPI signal with UCS2904 using smart IC.

Power Bottom Feed

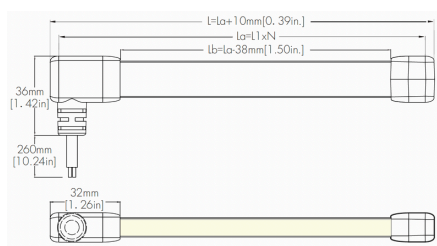

contourLED


NEON Side Bend Pixel DMX RGB

The Contour LED NEON Side Bend Pixel DMX RGB Strip Light features SMD5050 LEDs with a density of 84 LEDs per metre.


Available in 5m lengths.
3 year warranty.
UL/CE/RoHS approval.
Contact us for more specifications.





Power Rear Feed

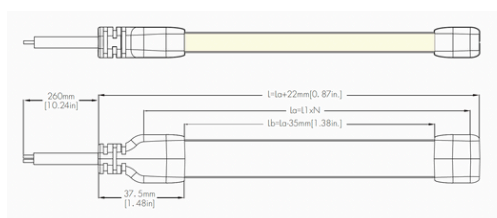


Power Side Feed

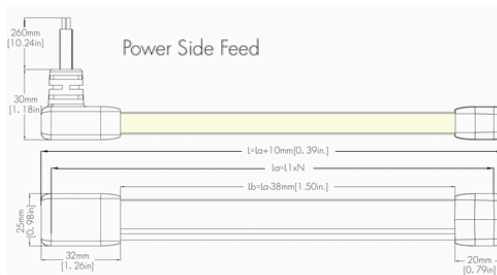

Power Bottom Feed

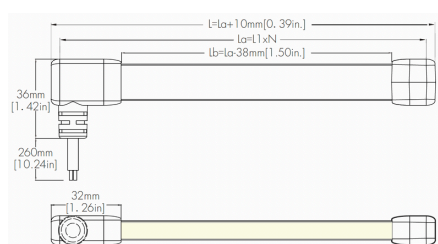

Contact us for more specifications info@ledlimited.co.uk
Find out more at www.ledlimited.co.uk

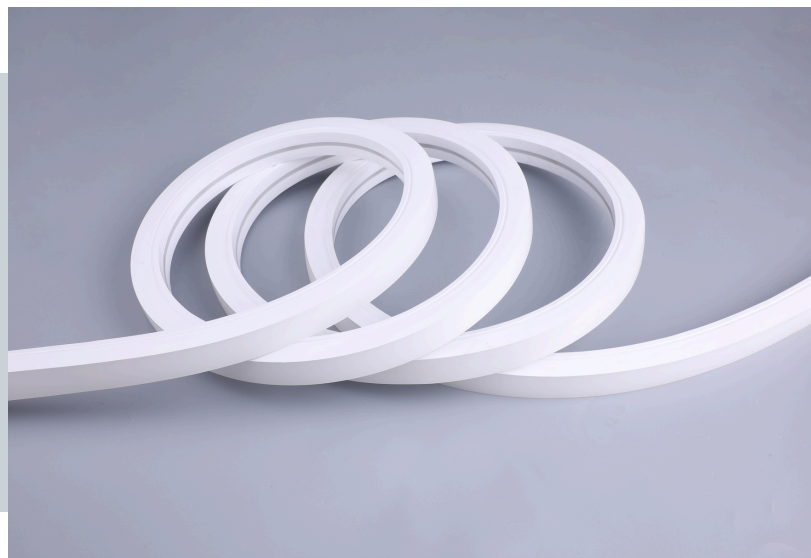

LED Type SMD5050

LED QTY 84LEDs/M

Pixel Density 14 Pixels/M

Voltage 24VDC

Power 14W/M

Colour Temp RGB

Brightness 80lm/M

Dimensions 5000 x 20 x 10mm

Cut Length 71.4mm

Beam Angle 120°

IP Rating IP67 & IK07

Dimming DMX signal with TM512AC using smart IC.

contourLED


NEON Side Bend Pixel DMX RGBW

The Contour LED NEON Side Bend Pixel DMX RGBW Strip Light features SMD5050 LEDs with a density of 84 LEDs per metre.


Available in 5m lengths.
3 year warranty.
UL/CE/RoHS approval.
Contact us for more specifications.





Power Rear Feed

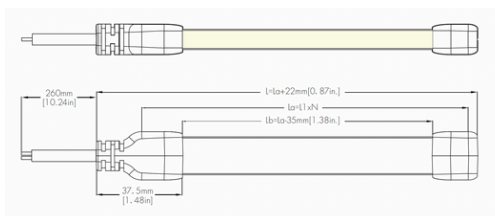


Power Side Feed

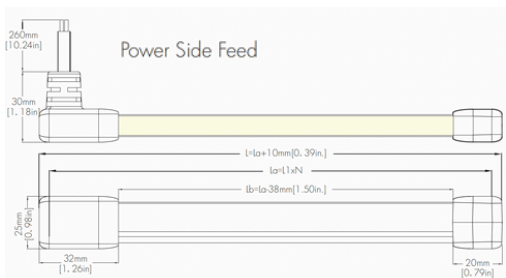

Power Bottom Feed

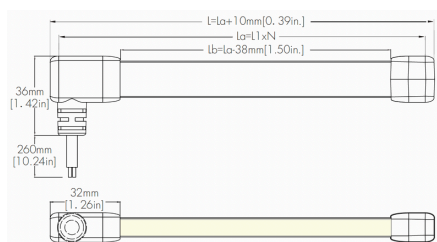

Contact us for more specifications info@ledlimited.co.uk
Find out more at www.ledlimited.co.uk

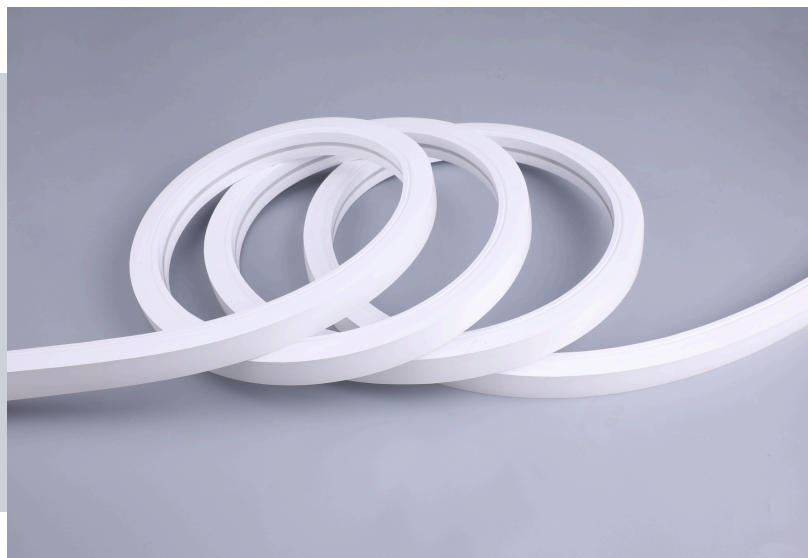

LED Type SMD5050

LED QTY 84LEDs/M

Pixel Density 14 Pixels/M

Voltage 24VDC

Power 18W/M

Colour Temp RGB+3000K
(Available options 2700K→6500K)

Brightness 140lm/M

Dimensions 5000 x 20 x 10mm

Cut Length 71.4mm

Beam Angle 120°

IP Rating IP67 & IK07

Dimming DMX signal with TM512AC using smart IC.