

# contourLED


## NEON Dual Bend White

The Contour LED NEON Dual Bend White Strip Light features SMD2835 LEDs with a density of 120 LEDs per metre.


Available in 5m lengths.  
5 year warranty.  
UL/CE/RoHS approval.  
Contact us for more specifications.



Power entry from the tail

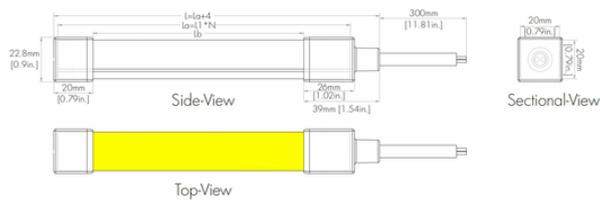


Power entry from the side

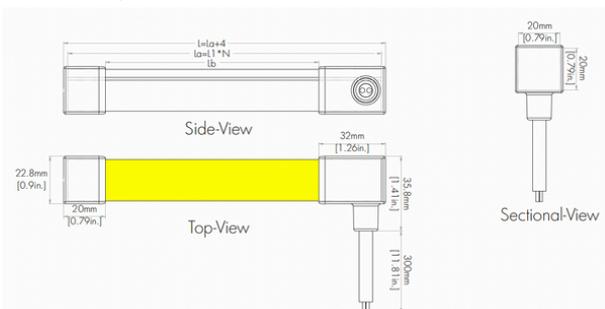

<b>LED Type</b>	SMD2835
<b>LED QTY</b>	120LEDs/M
<b>Voltage</b>	24VDC
<b>Power</b>	14W/M
<b>Colour Temp</b>	3000K (Available options 2700K→ 6500K)
<b>Brightness</b>	800lm/M
<b>Dimensions</b>	5000 x 20 x 20mm
<b>Cut Length</b>	Free cutting
<b>Beam Angle</b>	120°
<b>IP Rating</b>	IP67 & IK07
<b>Dimming</b>	PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*.) *Dependant third-party driver.

Power entry from the bottom

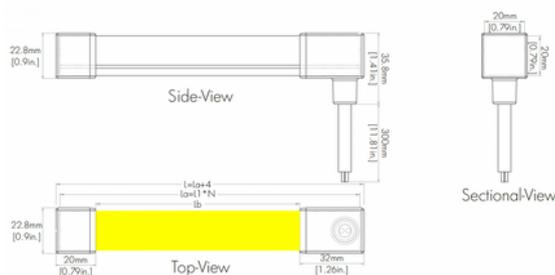

# contourLED


## NEON Dual Bend CCT

The Contour LED NEON Dual Bend CCT Strip Light features SMD2835 LEDs with a density of 240 LEDs per metre.


Available in 5m lengths.  
5 year warranty.  
UL/CE/RoHS approval.  
Contact us for more specifications.



Power entry from the tail

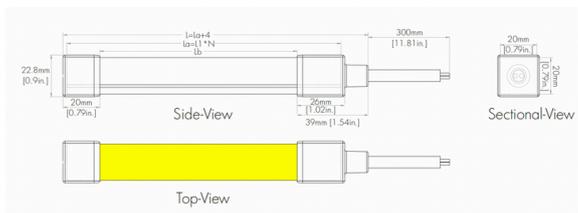

Power entry from the side

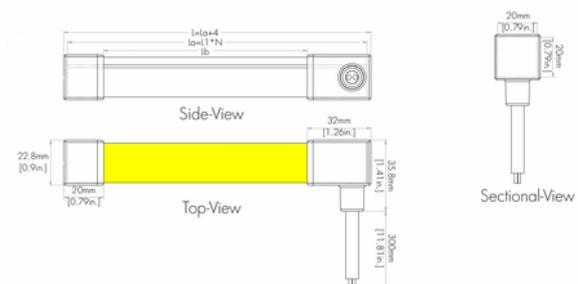


Contact us for more specifications [info@ledlimited.co.uk](mailto:info@ledlimited.co.uk)  
Find out more at [www.ledlimited.co.uk](http://www.ledlimited.co.uk)



<b>LED Type</b>	SMD2835
<b>LED QTY</b>	240LEDs/M
<b>Voltage</b>	24VDC
<b>Power</b>	14W/M
<b>Colour Temp</b>	2700→6000K
<b>Brightness</b>	780lm/M
<b>Dimensions</b>	5000 x 20 x 20mm
<b>Cut Length</b>	Free cutting
<b>Beam Angle</b>	120°
<b>IP Rating</b>	IP67 & IK07
<b>Dimming</b>	PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*). *Dependant third-party driver.

Power entry from the tail

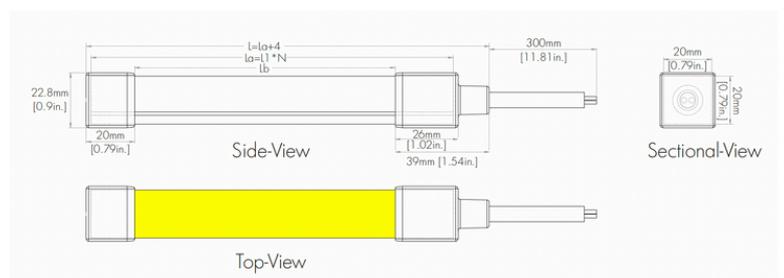

# contourLED


## NEON Dual Bend RGB

The Contour LED NEON Dual Bend RGB Strip Light features SMD5050 LEDs with a density of 96 LEDs per metre.


Available in 5m lengths.  
5 year warranty.  
UL/CE/RoHS approval.  
Contact us for more specifications.



Power entry from the tail

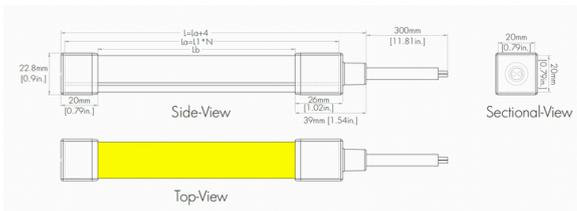

Power entry from the side

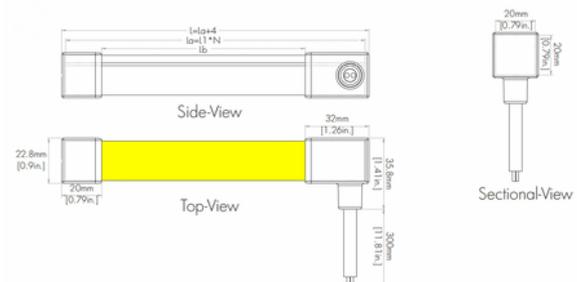


Contact us for more specifications [info@ledlimited.co.uk](mailto:info@ledlimited.co.uk)  
Find out more at [www.ledlimited.co.uk](http://www.ledlimited.co.uk)



<b>LED Type</b>	SMD5050
<b>LED QTY</b>	96LEDs/M
<b>Voltage</b>	24VDC
<b>Power</b>	14W/M
<b>Colour Temp</b>	RGB
<b>Brightness</b>	310lm/M
<b>Dimensions</b>	5000 x 20 x 20mm
<b>Cut Length</b>	62.5mm
<b>Beam Angle</b>	120°
<b>IP Rating</b>	IP67 & IK07
<b>Dimming</b>	PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*). *Dependant third-party driver.

Power entry from the tail

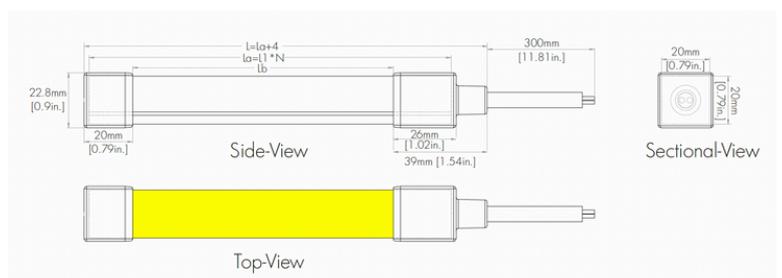

# contourLED


## NEON Dual Bend RGBW

The Contour LED NEON Dual Bend RGBW Strip Light features SMD5050 LEDs with a density of 96 LEDs per metre.


Available in 5m lengths.  
5 year warranty.  
UL/CE/RoHS approval.  
Contact us for more specifications.



Power entry from the tail

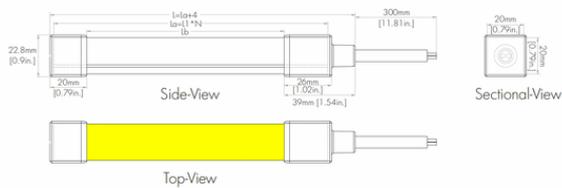

Power entry from the side

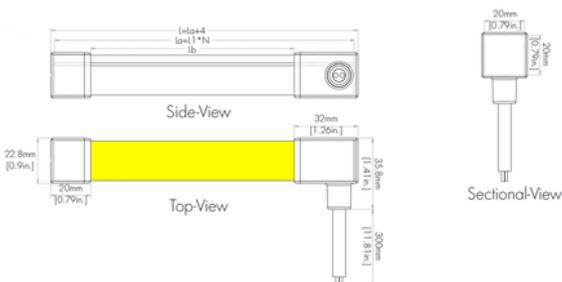


Contact us for more specifications [info@ledlimited.co.uk](mailto:info@ledlimited.co.uk)  
Find out more at [www.ledlimited.co.uk](http://www.ledlimited.co.uk)



<b>LED Type</b>	SMD5050
<b>LED QTY</b>	96LEDs/M
<b>Voltage</b>	24VDC
<b>Power</b>	14W/M
<b>Colour Temp</b>	RGB+3000K (Available options 2700K→6500K)
<b>Brightness</b>	440lm/M
<b>Dimensions</b>	5000 x 20 x 20mm
<b>Cut Length</b>	62.5mm
<b>Beam Angle</b>	120°
<b>IP Rating</b>	IP67 & IK07
<b>Dimming</b>	PWM (RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI*.) *Dependant third-party driver.

Power entry from the tail

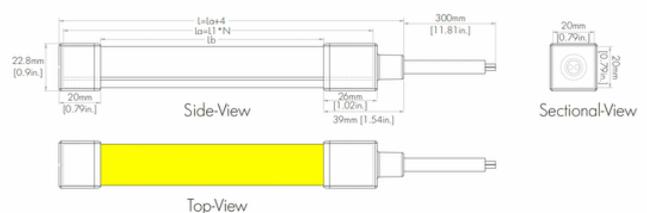

# contourLED


## NEON Dual Bend Pixel SPI RGBW

The Contour LED NEON Dual Bend Pixel SPI RGBW Strip Light features SMD4040 LEDs with a density of 96 LEDs per metre.


Available in 5m lengths.  
3 year warranty.  
UL/CE/RoHS approval.  
Contact us for more specifications.



Power entry from the tail

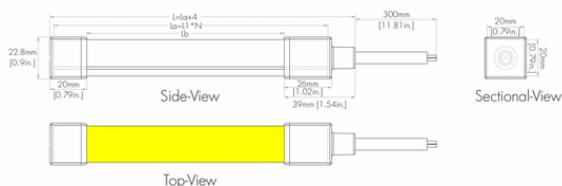

Power entry from the side

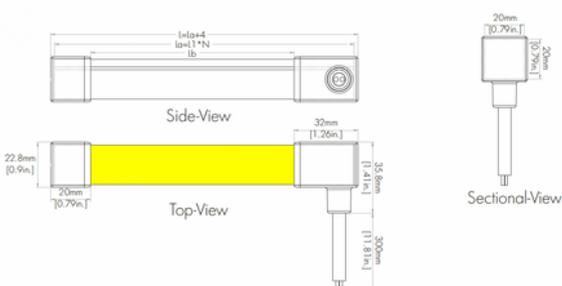


Contact us for more specifications [info@ledlimited.co.uk](mailto:info@ledlimited.co.uk)  
Find out more at [www.ledlimited.co.uk](http://www.ledlimited.co.uk)



<b>LED Type</b>	SMD4040
<b>LED QTY</b>	96LEDs/M
<b>Pixel Density</b>	16 Pixels/M
<b>Voltage</b>	24VDC
<b>Power</b>	14W/M
<b>Colour Temp</b>	RGB+3000K (Available options 2700K → 6500K)
<b>Brightness</b>	287lm/M
<b>Dimensions</b>	5000 x 20 x 20mm
<b>Cut Length</b>	62.5mm
<b>Beam Angle</b>	120°
<b>IP Rating</b>	IP67 & IK07
<b>Dimming</b>	SPI signal with UCS8904 using smart IC.

Power entry from the tail

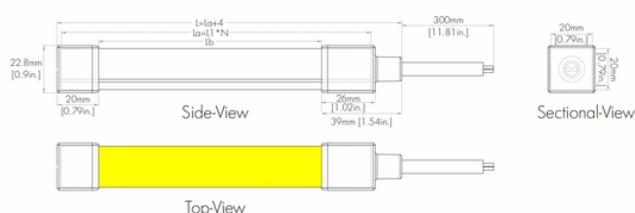

# contourLED


## NEON Dual Bend Pixel DMX RGBW

The Contour LED NEON Dual Bend Pixel DMX RGBW Strip Light features SMD5050 LEDs with a density of 96 LEDs per metre.


Available in 5m lengths.  
3 year warranty.  
UL/CE/RoHS approval.  
Contact us for more specifications.



Power entry from the tail

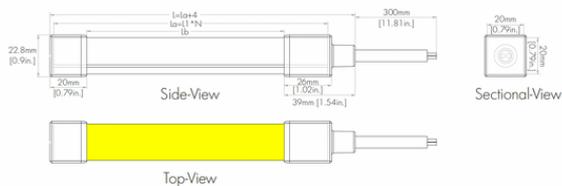

Power entry from the side

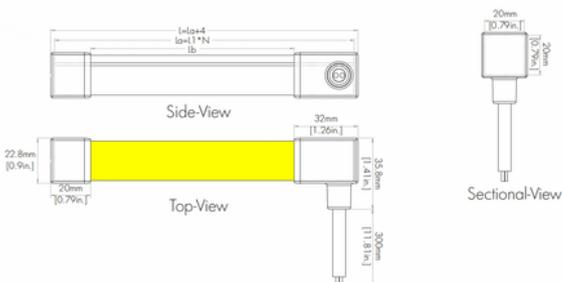

Contact us for more specifications [info@ledlimited.co.uk](mailto:info@ledlimited.co.uk)  
Find out more at [www.ledlimited.co.uk](http://www.ledlimited.co.uk)



<b>LED Type</b>	SMD5050
<b>LED QTY</b>	96LED/M
<b>Pixel Density</b>	16 Pixels/M
<b>Voltage</b>	24VDC
<b>Power</b>	14W/M
<b>Colour Temp</b>	RGB+3000K (Available options 2700K→6500K)
<b>Brightness</b>	280lm/M
<b>Dimensions</b>	5000 x 20 x 20mm
<b>Cut Length</b>	62.5mm
<b>Beam Angle</b>	120°
<b>IP Rating</b>	IP67 & IK07

**Dimming** DMX signal with TM512AC using smart IC.

Power entry from the tail

